

replacement for AIR TANKS



Features & Benefits:

- Rust resistant
- ARAI Certified (5455)
- Material specifications to meet SAE J10 & FMVSS 121 standards
- 150 PSI max. working pressure
- Individually tested against leaks
- Packed in individual high quality boxes for secure transport and optimum retail visibility

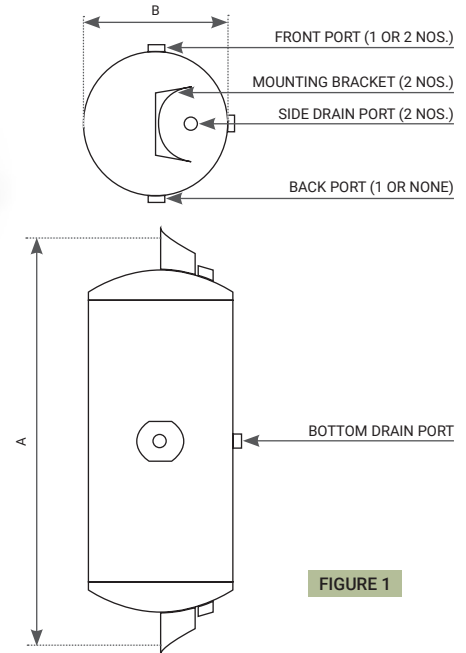


FIGURE 1

(SORTED BY OUTER DIAMETER)

MANSONS #	PORT TYPE	MOUNTING BRACKET	VOL. CAP. CUBIC INCH	LENGTH A	OUTSIDE Ø B	FRONT PORT	BACK PORT	BOTTOM DRAIN PORT	SIDE DRAIN PORT	AUTOMANN #	DAYTON #	EUCLID #	MERITOR #	SLOAN #	OTHER REF #
120.1783	3		1425	32"	8"	3/4"	3/4"	1/4"	3/8"-2	172.2000TH	-	E-10732	R95510732	461027	HT8014 035102, 59550
120.1784	2		1488	27.5"	9.5"	1/2"-2	0	1/4"	3/8"-2	172.2029	-	-	-	461033	HT-9542, 20011
120.1780	1		1488	27.5"	9.5"	3/4"	0	1/4"	3/8"-2	172.2001	12-148800	E-10734	R95510734	461005	HT-9500 2001B, 224105
120.1782	3		2850	29.5"	12"	3/4"	3/4"	1/4"	3/8"-2	172.2002A	12-285005	E-10733	R95510733	461009	035108
120.1781	2		2850	29.5"	12"	3/4"-2	0	1/4"	3/8"-2	-	12-285029	-	-	-	HT-1249, 035109

IDENTIFY THE NUMBER OF MAIN PORTS (See Figure 2)

Front View	Number of Front Ports
Rear View	Number of Back Ports
PORT TYPE 1	1 FRONT PORT
PORT TYPE 2	2 FRONT PORT
PORT TYPE 3	1 FRONT & 1 BACK PORT
PORT TYPE 4	2 FRONT PORTS & 1 BACK PORT

FIGURE 2



e-mail: sales@mansons.in • website: www.mansons.in
Reference in this catalogue to OEM / third party names, part numbers / OEM numbers is only for information on OEM / third party parts corresponding to Mansons components & does not imply any connection / affiliations between Mansons & the OEM.

